

microlene

purified water

COOLERS



MODEL SR-2A

MODEL MP-4

the easiest way
to clean,
healthy water



microlene
purified water

Refrigerated Drinking Water COOLERS



The SR-2A bottle cooler has been specifically designed for those locations where mains water cannot be connected to the cooler. The coolers are fully automatic in operation and once connected to power will operate automatically under all conditions. The MP-4 plumbed-in unit is simply connected to a mains water supply by way of 1/4 inch feed line.

COLD WATER TANK

The Stainless Steel tank holds approximately 3.4 litres during normal usage.

WATER STORAGE BOTTLE

The 19 litre bottle is manufactured from clear shatterproof Polycarbonate. A no spill FLO-CAP is provided with each bottle which makes it easy to refill and replace the bottle.

CHILLING CAPACITY

12 litres per hour.

COMPRESSOR

The compressor is a hermetically sealed unit for quiet, trouble-free running.

CONDENSER

The condenser is made of steel wire welded to Bundy Tubing construction.

TEMPERATURE CONTROL

The thermostat is adjustable for the cold water supply.

REFRIGERANT CONTROL

This is a capillary tube system with no moving parts.

REFRIGERANT (OZONE FRIENDLY)

R134A – not a CFC

ELECTRICAL

240 Volt, 50Hz power supply required
0.7 Amps full load

DIMENSIONS

920mm x 310mm x 310mm
Bottle: add 415mm to height
Packed size: 1105 x 385 x 385

INSTALLATION

There must be at least 75mm air gap between the back of the wall unit and the wall so the condenser heat can be vented.

MAINTENANCE

We recommend a Microlene Service Agreement be entered into as regular sanitising is required to ensure safe drinking water.


the **easiest** way
to **clean,**
healthy water

ADVANTAGES OF HAVING A PLUMBED-IN COOLER OVER A BOTTLE COOLER

- No bottles to refill
- More hygienic as water comes directly from the mains supply
- Requires less servicing




CUP DISPENSER

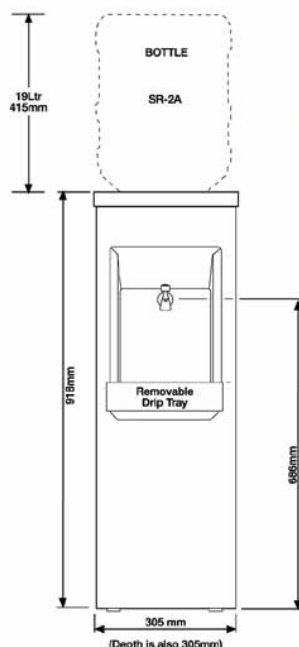

MICROLENE BENCHTOP SLIMLINE PART NO. BTPC-2HK-1

Microlene Benchtop Purifier supplied with the SR-2A bottle cooler is for connection to a cold tap to refill the bottle.
Note: MP-4 mains pressure units have a PC-2HK-1 in-line purifier module.

- Stylish design - 30,000 litre life typically
- Bacteriostatic - Gives long hygienic life - EPA Reg No: 37589
- 1 Micron Filtration - Giardia and Asbestos Safe - Tested by Massey University
- Dual Purification Media - Reduces chemicals and metals. Retains beneficial minerals.

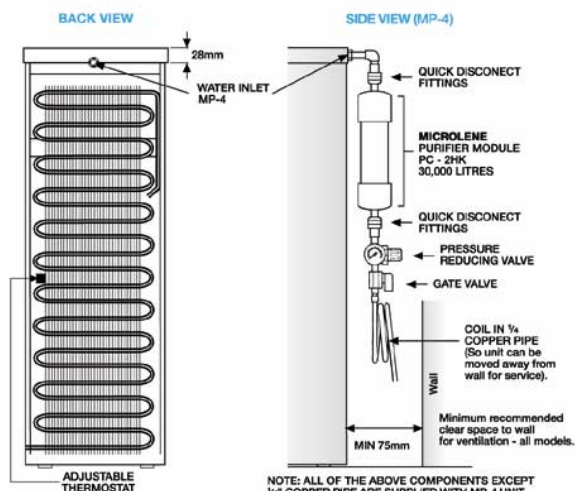

CONTAMINATION CONTROL LTD
PO BOX 14641 Auckland 1741
Ph. (09) 570 9135
Customer Service Centre
0800 654 333